

Buy X-Priv Kit

Smok X-Priv Replacement Tanks & Coils

Specifications:

X-Priv Mod		TFV12 Prince
Size: 88x46.5x30.4mm	Weight: 172g	Material: Stainless Steel
Power Range: 1W-225W	Standby Current: <500uA	Size: 28x63mm
Output Voltage: 0.5V-9.0V		Weight: 60g
Resistance Range: 0.1Ω-2.5Ω (VW) / 0.05Ω-2Ω (TC)		Capacity: 8ml
Temperature Range: 200°F--600°F/100°C--315°C		Thread: 510

Verification

- Using your Smartphone or PC visit the SMOK official website: <http://www.smoktech.com/support/>
- Scratch off the coating of the security film on the package to reveal the 16 authentication code. Enter it into the input field on the webpage to verify. The result will be displayed after a few seconds.
- If you have any questions, please contact SMOK via e-mail, phone or our website to get more help.

2

Introduction:

X-Priv, a perfect combination of power and beauty. It is covered with glassy material at front, which can offer you a deluxe appearance and a high-definition screen. It employs newly designed UI, more simple and intuitive than other products. And its output power can up to 225W, which can meet different demands of vapor chasers. The fire key of X-Priv is creatively designed on the left side, much easier to operate than before. Moreover, it uses TFV12 Prince tank, with powerful V12 Prince cores you can fully enjoy the massive vapor. Powerful function, fancy appearance, X-Priv is here to conquer you! Innovation keeps changing the vaping experience!

The Kit Includes:

- 1 x X-Priv Mod
- 1 x TFV12 Prince Tank
- 1 x V12 Prince-Q4 0.4Ω Quadruple Coils (Pre-installed)
- 1 x V12 Prince-T10 0.12Ω Decuple Coils
- 1 x Replacement Glass Tube
- 1 x User Manual
- 1 x USB Cable
- Spare Parts

1

Warranty

Note: Please carefully keep the anti-counterfeiting codes on the package. Only the activated products can get after-sale service.

X-Priv Kit Warranty Period: 6 Months from the Purchase Date.

Within the 6 Months, some items may not be eligible for service due to misuse, damage, or other failures caused by end users. SMOK's warranty only covers manufacturer defects or premature failure. Please contact a SMOK Authorized Vendor for more information and terms of service.

The "X-Priv Kit Customer Card" is an important proof for customers to correctly warranty claim. Please keep it. Read the card carefully and fill it out properly. Warranty claims must be accompanied with this card. For more warranty policies and processes, please visit our official website: <http://www.smoktech.com/support/>

3

Components



4

Attach Atomizer

The X-Priv uses a spring loaded 510 connector. Please be certain that there is nothing between the Mod and the attached atomizer.

- Connect the atomizer to the device and tighten it clockwise.
- After the device is powered on, please press the Fire Key to vape.

Mod Operations

1. Power On: While the device is off, quickly click Fire Key 5 times in 2s to turn it on. The screen successively displays "SMOK";

2. Vaping:

- While the device is on, hold Fire Key to vape (it will be forced to stop working when one vaping is longer than 10s, release and press again to vape again);
- Quickly press the Fire Key 5 times to lock or unlock.


3. Screen Unlocked Status:

- Press Fire Key and DOWN button simultaneously to choose your desired

6

on the Fire Key to confirm your selected function; UP/DOWN Button can navigate the menu.

1) VW Mode

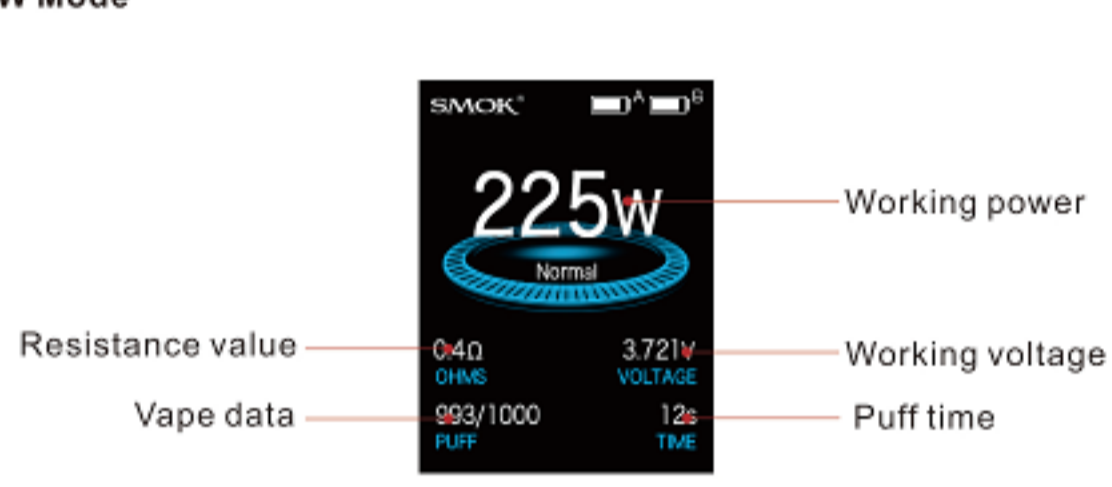

8

2) TC Mode



- TC Mode is available for X-Priv, only works with a TC type atomizer.
- Enter TC Mode: switch to TC Mode (Ti, Ni, SS), VW Mode and MEMORY Mode by pressing Fire Key + DOWN Button simultaneously while screen is unlocked or by quickly pressing the fire button 3 times and selecting Mode, and then select TEMP.

10

- Enter MEMORY Mode: select from TC Mode, VW Mode and MEMORY Mode by pressing Fire Key + DOWN Button simultaneously while screen is unlocked.
- Wait 5s or press and hold the Fire Key to set M1-M23 settings; increase or decrease the wattage value by UP or DOWN button.

4) Puff Setting



- Puff Setting: Set puff limit number.
- Puff Clear: Puff counter clearing function.
- Puff Already: Puff number taken so far.

12

Tank Operation

How to fill with e-liquid:

- Hold the tank with one of your hands, and use another one to press button and then move the cap counterclockwise.



- Add e-liquid through the slot, and pay attention to drip it into the central airflow tube.



14

Control air input:

Rotate the bottom adjustable airflow system to control air input.



Adjustable Airflow Ring

If you need any additional information or have any questions about the products or its use, please contact your local SMOK agent or to visit our website www.smoktech.com

16

- Close the cap carefully and firmly. Then let it stand for several minutes to get the organic cotton completely saturated.



Replace atomizer core:

First, unscrew the base, then unscrew the coil head from the base, then secure your new coil head onto the base plate (ensure that it is screwed in securely), finally screw the new coil head into the chimney and you're ready to prime your new coil head.



15

Attentions

- Before using please read the manual carefully.
- Connect the atomizer to a power source that is suitable for its intended use.
- Please avoid getting the e-liquid into your mouth directly.
- Please do not store liquid inside the tank if it is not going to be used for a long period.
- Please refill the tank when the e-liquid is nearly used out to avoid dry-burning of the atomizer.
- Please do not drop, throw or mishandle this product as the outer shell or inner components may be damaged.
- In order to prolong the operation of your product, please keep it away from excessive temperature and humid environment.
- Please keep this product away from children and pregnant women.



17

LEGAL DISCLAIMER

Underage sale is prohibited. Depending on your country/region's legal smoking age. 18+ and over 21+ in other countries/regions.

WARNING

This product is not intended for use by persons under legal smoking age, nonsmokers, women who are pregnant or breastfeeding, or persons with or at risk of heart disease, high blood pressure, diabetes, or taking medicine for depression or asthma.

Appendix 1 Key Function Table

Key	Function(Screen Unlock Status)	Function(Screen Locked Status)
Power	Fast click 5 times in 2s – Power On; Fast click 5 times – Screen Locked; Fast click 3 times in 2s – Menu Choose; Hold on – Vape; Release – Standby	Long press 5s – Choose POWER OFF to Power OFF; Fast click 5 times – Unlock Screen
UP	Click Down – Increase the temperature (TC Mode) Click Down – Increase the wattage (VW Mode)	
DOWN	Click Down – reduce the temperature (TC Mode) Click Down – reduce the wattage (VW Mode)	
Power + UP	Click Down – Change TC Effect(10-225W) or VW Effect (Hard/Norm/Soft)	
Power + DOWN	Click Down – Change Working Mode (TC / VW / MEMORY)	

Appendix 2 Screen Prompts Table

Prompts	Details
"SMOK"	Power on success
"SMOK"	Power off success
BATTERY LOW	Battery voltage is lower than 6.4V
BATTERY HIGH	Input voltage is higher than 9V, you cannot power on
NO ATOMIZER	Atomizer hasn't been detected or the resistance higher than 10Ω
ATOMIZER NEW/OLD	Shows when you change your atomizer
OHM TOO LOW	Low resistance value(≤0.10Ωin VW; ≤0.05Ωin TC) has been detected, replace atomizer

OHM TOO HIGH	High resistance value has been detected, replace atomizer
ATOMIZER SHORT	Short circuit has been detected, replace atomizer
TEMPERATURE TOO HIGH	The inner temperature is too high

Welcome to download our APP: Vaping Tour, share your vaping experience and communicate with global vapor fans.



Buy X-Priv